

QP08-16


TCCI compressors deliver proven, high-performance thermal solutions for Class 3–8 commercial vehicles and recreational platforms worldwide.

Primary applications include for trucks, buses, construction, agricultural, military, specialty vehicles and transport refrigeration.



Performance Curve QP08-16

Discharge: 1.52 MPag, Suction: .182 MPag
S.H. / S.C.: 10 / 5 deg K

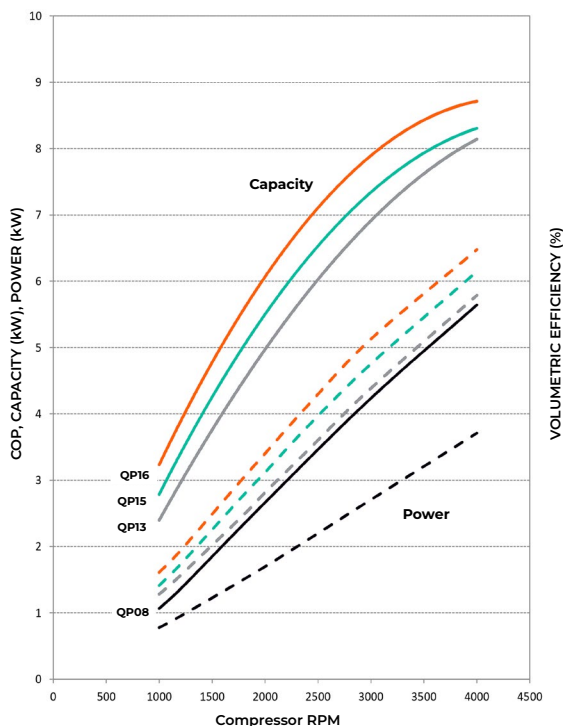

Model

QP08-16

Type

Swash Plate

Mount Types

Direct and Ear Mount Designs

Refrigerant

R-134a, 404a, 452a

Lubricant

PAG, POE

Voltage

12/24

Backed by validation at the **Climatic Center for Innovation & Research (CCIR)**, TCCI compressors are tested under realistic duty cycles and ambient extremes-reducing development risk and accelerating time-to-market.

With multiple global manufacturing locations and regional engineering support, TCCI ensures total delivered value with extensive system-level validation, tested integration support, and long-term field-tested reliability with every unit.

PERFORMANCE AND DURABILITY COUNT

sales@tccimfg.com

TCCI

TCCIImfg.com